

GBL-X 920 CM (CENTERMOUNT)

Backhoe Loader

The GEHL GBL-X 920 S is built to last. Redefining the landscape by hosting multiple high-level tools. Transforms your workers and multiplies the amount of work you complete on site. With a turn of the operator's chair change from heavy bucket force to true digger power. Equip with outriggers to stabilize the machine, add lifting power and keeping our operators safe. Warriors in any urban work environment. Often used in construction, small demolitions, building material handling, powering building equipment, digging holes/excavation, landscaping, breaking asphalt, and paving roads... just to name a few. Available in a center-mount (CM) digging configuration or side-mount (S).



GEHL®

Capacities		Metric
Wheelbase	y	2130 mm
Weight and dimensions		
Unladen weight		7400 kg
Unladen weight with 4 WD		7515 kg
Unladen weight with 4 WD 7 in 1		7803 kg
Ground clearance	m4	400mm
Overall length	l1	7338 mm
Overall width	b1	2330 mm
Cabin height	h6	2770 mm
Overall height	h17	3762mm
External turning radius over tyres (unbraked / braked)	Wa1 / Wa1	4.2 m / 3.6 m
External turning radius overbucket (unbraked/ braked)	Wa5/ Wa5	5.5 m / 5 m
Standard tyres front / rear		9 x 16 - 16 PR / 12.5 x 18 - 12 PR
Optional tyre (front / rear)		12.5x 18- 12PR/ 9x16- 16PR/ 14x 25- 20PR
Performances		
Travel speed forward 1st / 2nd		5.4 km/h / 8.6 km/h
Travel speed forward 3rd / 4th		19.9 km/h / 40 km/h
Engine		
Engine brand		Perkins
Engine model		1104D 44T Turbo Charged Water Cooled Tier-2 Engine
Max. capacity (l)		4.40 l
Gross Power (HP) / Gross Power		92 HP @ 2200 rpm
Max. torque		395 Nm
Battery / Batteries capacity		12 V / 75 Ah
Transmission		
Transmission brand		Carraro
Number of gears (forward / reverse)		4 / 4
Torque converter stall ratio		3.01:1
Service brake		Wet disc brakes
Hydraulics		
Hydraulic flow		142 l/min
Main relief pressure		225 Bar
Tank capacities		
Hydraulic oil		90l
Liquid cooling tank volume		16l
Fuel tank		120 l
Transmission oil		15l
Engine oil		9.10 l
Oil rear axle		17.50l
Bucket		
Backhoe standard capacity		0.18 cm ³
Width backhoe bucket		892 mm
Loader standard capacity		1 m ³
Width loader bucket		2235 mm
Miscellaneous		
Power steering		true
Front steer axle of oscillation		16°
Steering wheels (front / rear)		2 / 2


Performance backhoe

	Standard dipper	Extending dipper	
		Retracted	Extended
p1 - Max dig depth (mm)	4741	4741	5815

	Standard dipper	Extending dipper	
		Retracted	Extended
r1 - Max reach ground level to slew center (mm)	5730	5730	7019
r2 - Max loading reach (mm)	3871	3817	4849
Max operating height (mm)	5659	5659	6637
h22 - Max loading height SAE (mm)	3553	3553	4531
Max loading height (mm)	3871	3819	4849
p2 - Max straight wall dig depth (mm)	2602	2602	3991
a10 - Max bucket rotation (°)	194	194	194
Total side shift (mm)	1198	1198	1198
Dipper tearout (kgF)	4336	3946	2644
Bucket tearout (kgF)	5810	5219	5219
Hydraulic lift capacity (kg)	1460	1184	812

Performance loader

	Standard shovel	7-in-1 shovel
Max dump angle (°)	57	57
h26 - Max operating height (loader version) (mm)	4230	4298
h23 - Max dump height at 45° (mm)	2108	2708
h24 - Max loadover height (mm)	3310	3319
h25 - Max hinge pin height (mm)	3550	3550
r - Max reach at full height (mm)	1282	1282
r3 - Max reach at full height 45° (mm)	829	828
p3 - Below ground dig depth (mm)	156	156
Rollback at ground (°)	45	45
Shovel breakout (kgf)	5229	4580
Arms breakout (kgF)	5312	4345
Lifting capacity to full height (kg)	3819	3058

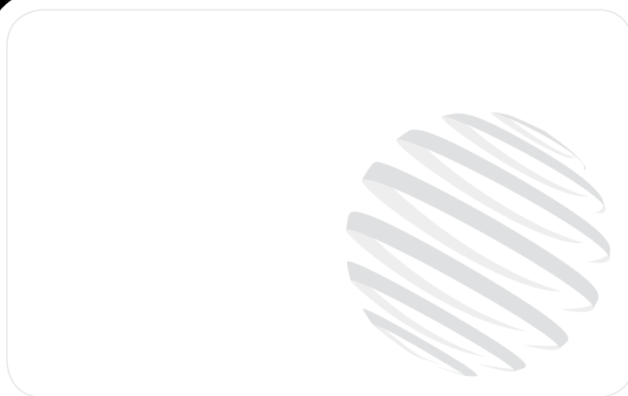

GEHL®

Siège Social

P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095

Tel: (262) 334-9461 - Fax: (262) 338-7517

www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only. MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend